

Patents Pending

3" Transverse Flue Space Requirement

Flue space requirements differ in various locations!

Food storage warehouses must have at least 12" space between palletized product and a wall or pallets back to back for rodent trap placement and cleaning purposes.


Adapt-a-Stop® horizontal load stop beams can be used at any height because the 6" fire safety flue space requirement is fulfilled. .

3" Pallet Overhang

6" Longitudinal Flue Space Fire Safety Code Requirement between pallets

3" Pallet Overhang

Top view showing fire safety code requirement for fire sprinkler effectiveness. 6" flue space required for racks up against a wall or racks that are set up in a back to back configuration.

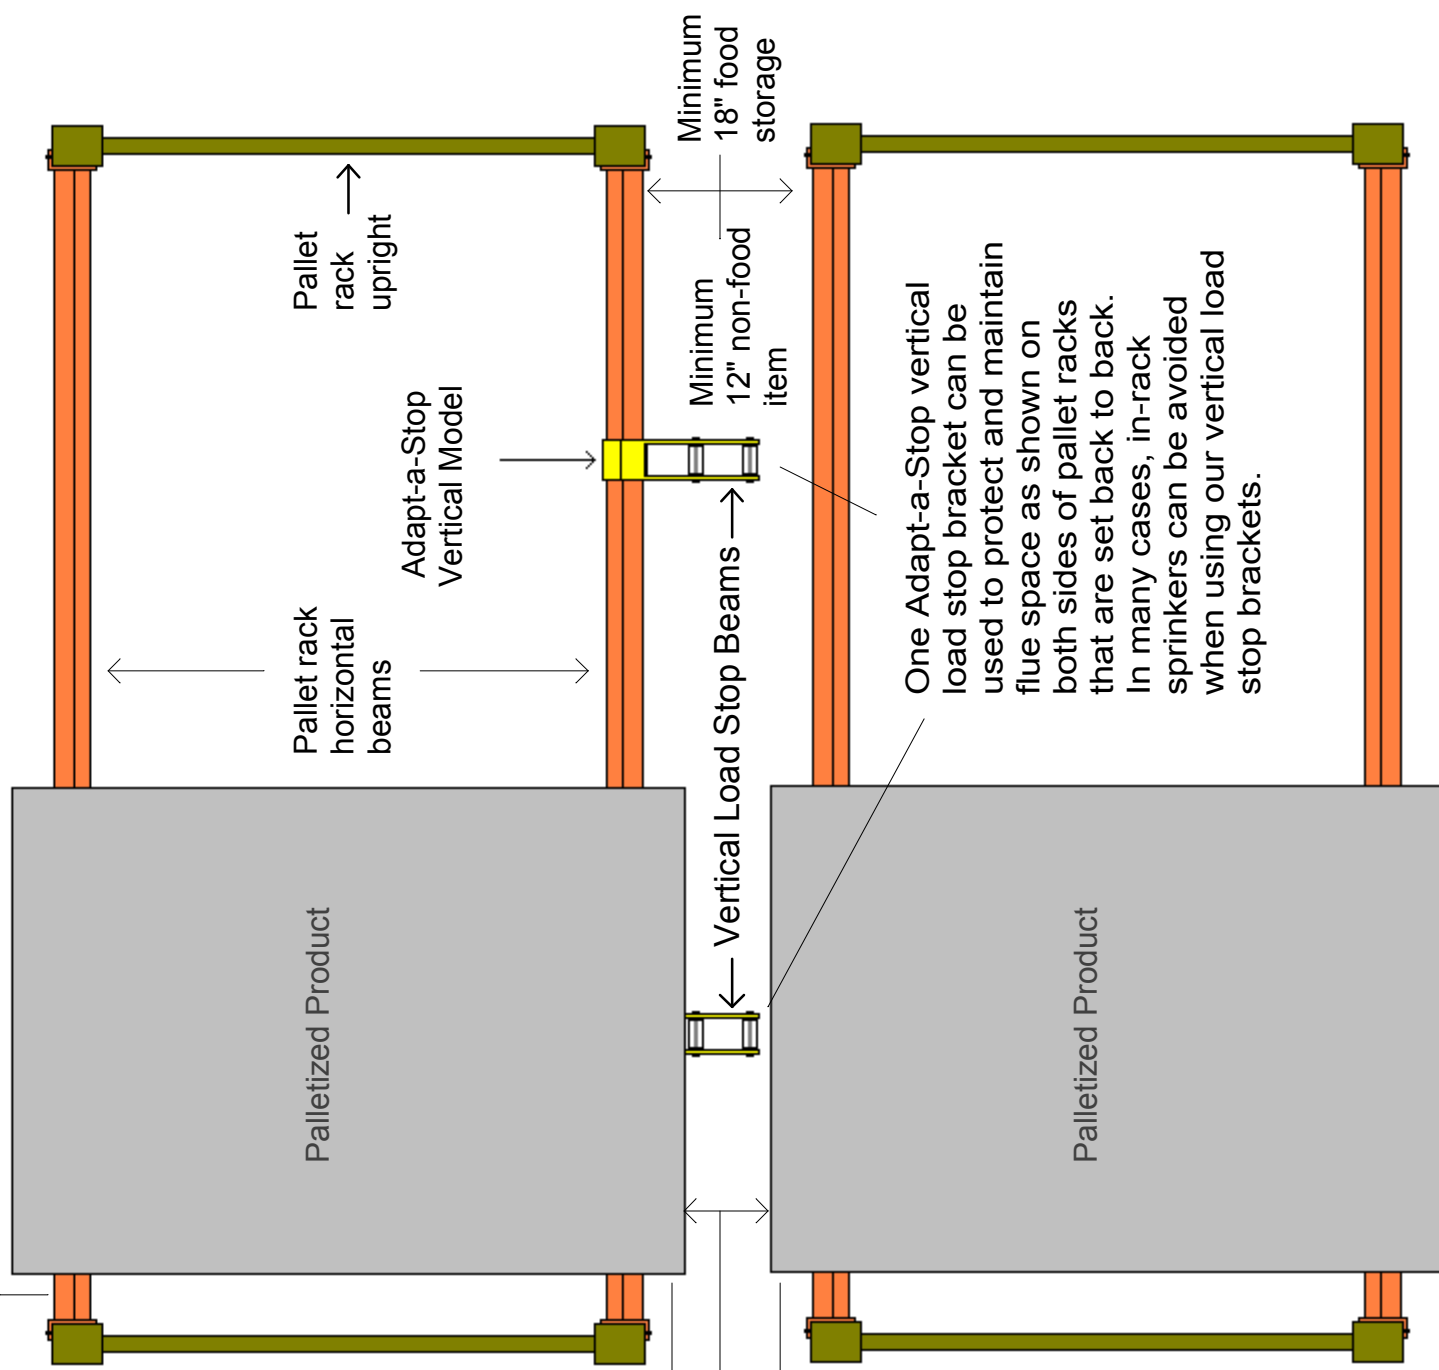

One Adapt-a-Stop vertical load stop bracket can be used to protect and maintain flue space as shown on both sides of pallet racks that are set back to back. In many cases, in-rack sprinklers can be avoided when using our vertical load stop brackets.